




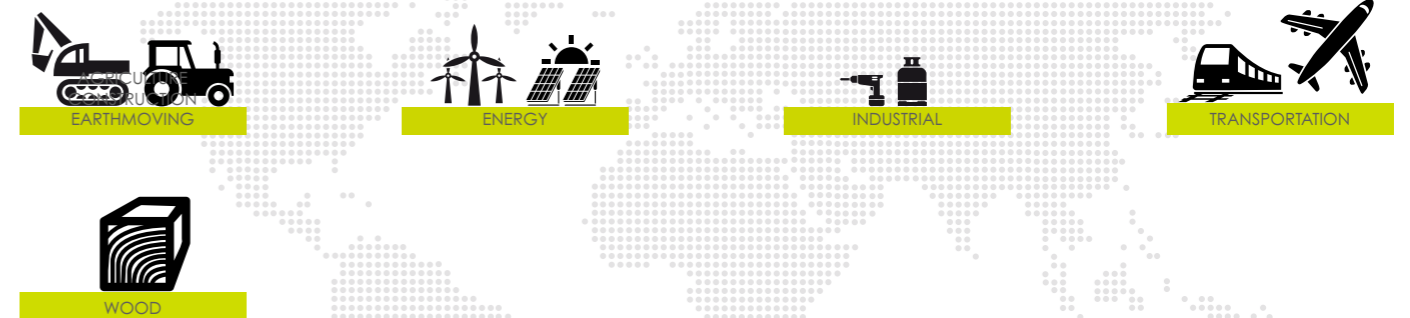
## REXSON 60C60 Extrusion Pump

High Viscosity / Pumps



-  Technology breakthrough
-  Ergonomy for increased productivity
-  Cost reduction

### Markets





# REXSON 60C60 Extrusion Pump

The chop-check extrusion pump can handle most sealant & adhesive materials and can be pumped from the original containers (20 or 200 liters).

Sames offers a wide range of elevators, filters, regulators, follower plates, gun and hoses to suit your application needs.



## Technical data table

Designation	Value	Unit: metric (US)
Pressure Ratio	60:1	
Maximum Fluid Pressure	360 (5221)	bar (psi)
Maximum Air Pressure	6 (87)	bar (psi)
Maximum Temperature	60 (140)	°C (°F)
Weighted Sound Level	3000	dB(A)
Fluid Volume per Cycle	60	cc
Free Flow Rate	3.6	l/mn (gal/mn)
Fluid Output at 15 cycles / mn	0.9	l/mn (gal/mn)
Air Consumption at 30 cycles/mn at 4 bar (60 psi)	30	m³/h (cfm)
Seal Packings	PTFE+PE	
Wetted Parts: Carbon Steel	•	
Air Inlet	F 3/4"G	
Fluid Outlet	F 3/4"G	
Fluid Inlet	Ø80	
Weight	19 (42)	kg (lbs)




## Technologies



Chevron Sealing



Chop Check



Switch Motor

## Performance

- ◆ Optimal fluid passage design for low shearing

## Productivity

- ◆ Large selection of follower plate sizes to fit a wide range of pail and drums
- ◆ Quiet air motor for better work conditions

## Sustainability

- ◆ External valve accessibility for easy maintenance
- ◆ Large variety of cartridges for easy replacement: PE, PE+PTFE, & PE+Leather



## Description

